

Technical Data

TOP AUTOMATIQUE (WHITE, YELLOW, RED, BLUE)

Semi-Permanent Spot/Survey Marking Paint

Description

TOP AUTOMATIQUE semi-permanent spot and survey marking paints from ROCOL®. Developed extensively with the people that use spot marking paints every day, we have formulated this premium product.

Features & Benefits

- Patented clog-free spray through cap.
- Effective on damp and 0 °C surfaces.
- One pass system gives excellent, bright, durable markings that are required to last 3 – 6 months.
- Fast drying – touch dry in 10 minutes.
- Suitable on asphalt, tarmac, concrete, metals, timber, soil, grass, sand, gravel, artificial/natural stone, brickwork and composites surfaces.

Technical Data (Typical)

Colour	White, Yellow, Red, and Blue
Drying time @ 20 °C: Touch dry	10 minutes
Drying time @ 20 °C: Vehicular, no pickup time (BS EN 1436:2018)	30 minutes
Shelf life	2 years
Maximum Chemical Resistance	4 – 7 days

Health & Safety

Refer to Safety Data Sheet before use. If further copies are required or for further information, please contact us at customer.service@rocol.com.

Safety Data Sheets

The latest safety data sheets are available for download from our website www.rocol.com or may be obtained from your usual ROCOL® contact.

Disclaimer

The information in this publication is based on our experience and reports from customers. There are many factors outside our control or knowledge which affect the use and performance of our products, for which reason it is given without responsibility.

Directions For Use

Before Application

Shake the can until the agitator balls start to rattle, then continue shaking for at least 1 minute to ensure the paint is fully mixed and there is no settlement. Depress the nozzle as illustrated.



Application

Invert the can with the cap pointing downwards at a distance of 10 cm from the surface to be marked. The nearer the cap is to the surface, the more accurate and defined the markings will be. TOP AUTOMATIQUE spot marking paint is recommended for applications that require paint to last 3 and 6 months*.


**Duration may vary due to surface conditions, weather, paint thickness and traffic levels. We recommend you test a small area before use.*

After use

Hold the can at arm's length in an upright position and pointing away from your eyes and face, and away from anybody in a well ventilated area. Depress the cap for 3-5 seconds to clear paint residue. Failure to do this may cause blockage of the cap. Finally secure the cap by squeezing the clips together and releasing the trigger, as shown below.

Technical Data

TOP AUTOMATIQUE (WHITE, YELLOW, RED, BLUE) Semi-Permanent Spot/Survey Marking Paint

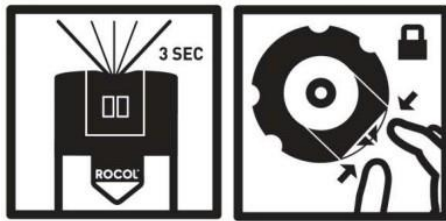

Always store cans (1) securely on their side, (2) in a cool place away from sources of ignition, and (3) never store in direct sunlight.

Removing TOP AUTOMATIQUE Paints

If for any reason you want to remove TOP paint, use an industrial paint stripper. On porous surfaces more than one application of paint stripper may be required.

Warning

TOP AUTOMATIQUE is a pressurised container. Protect from sunlight and do not expose to temperatures exceeding 50 °C. Do not spray onto naked flame or any incandescent material. Do not pierce or burn after use.

Technical Data

TOP AUTOMATIQUE (WHITE, YELLOW, RED, BLUE)

Semi-Permanent Spot/Survey Marking Paint

TOP AUTOMATIQUE Part Code

We have discontinued the CONTRACTOR FUSION product range (750 ml pack size) and have replaced with an equivalent alternative, TOP AUTOMATIQUE (500 ml pack size), in a range of colours list below with the relevant part codes.

Available product				Discontinued			
Part code	Product	Colour	Pack size	Part code	Product	Colour	Pack size
801801	TOP AUTOMATIQUE	WHITE	500 ml	44080	CONTRACTOR FUSION	WHITE	750 ml
801802	TOP AUTOMATIQUE	YELLOW	500 ml	44081	CONTRACTOR FUSION	YELLOW	750 ml
801803	TOP AUTOMATIQUE	RED	500 ml	44083	CONTRACTOR FUSION	RED	750 ml
801806	TOP AUTOMATIQUE	BLUE	500 ml	44084	CONTRACTOR FUSION	BLUE	750 ml

